
Front Elevation

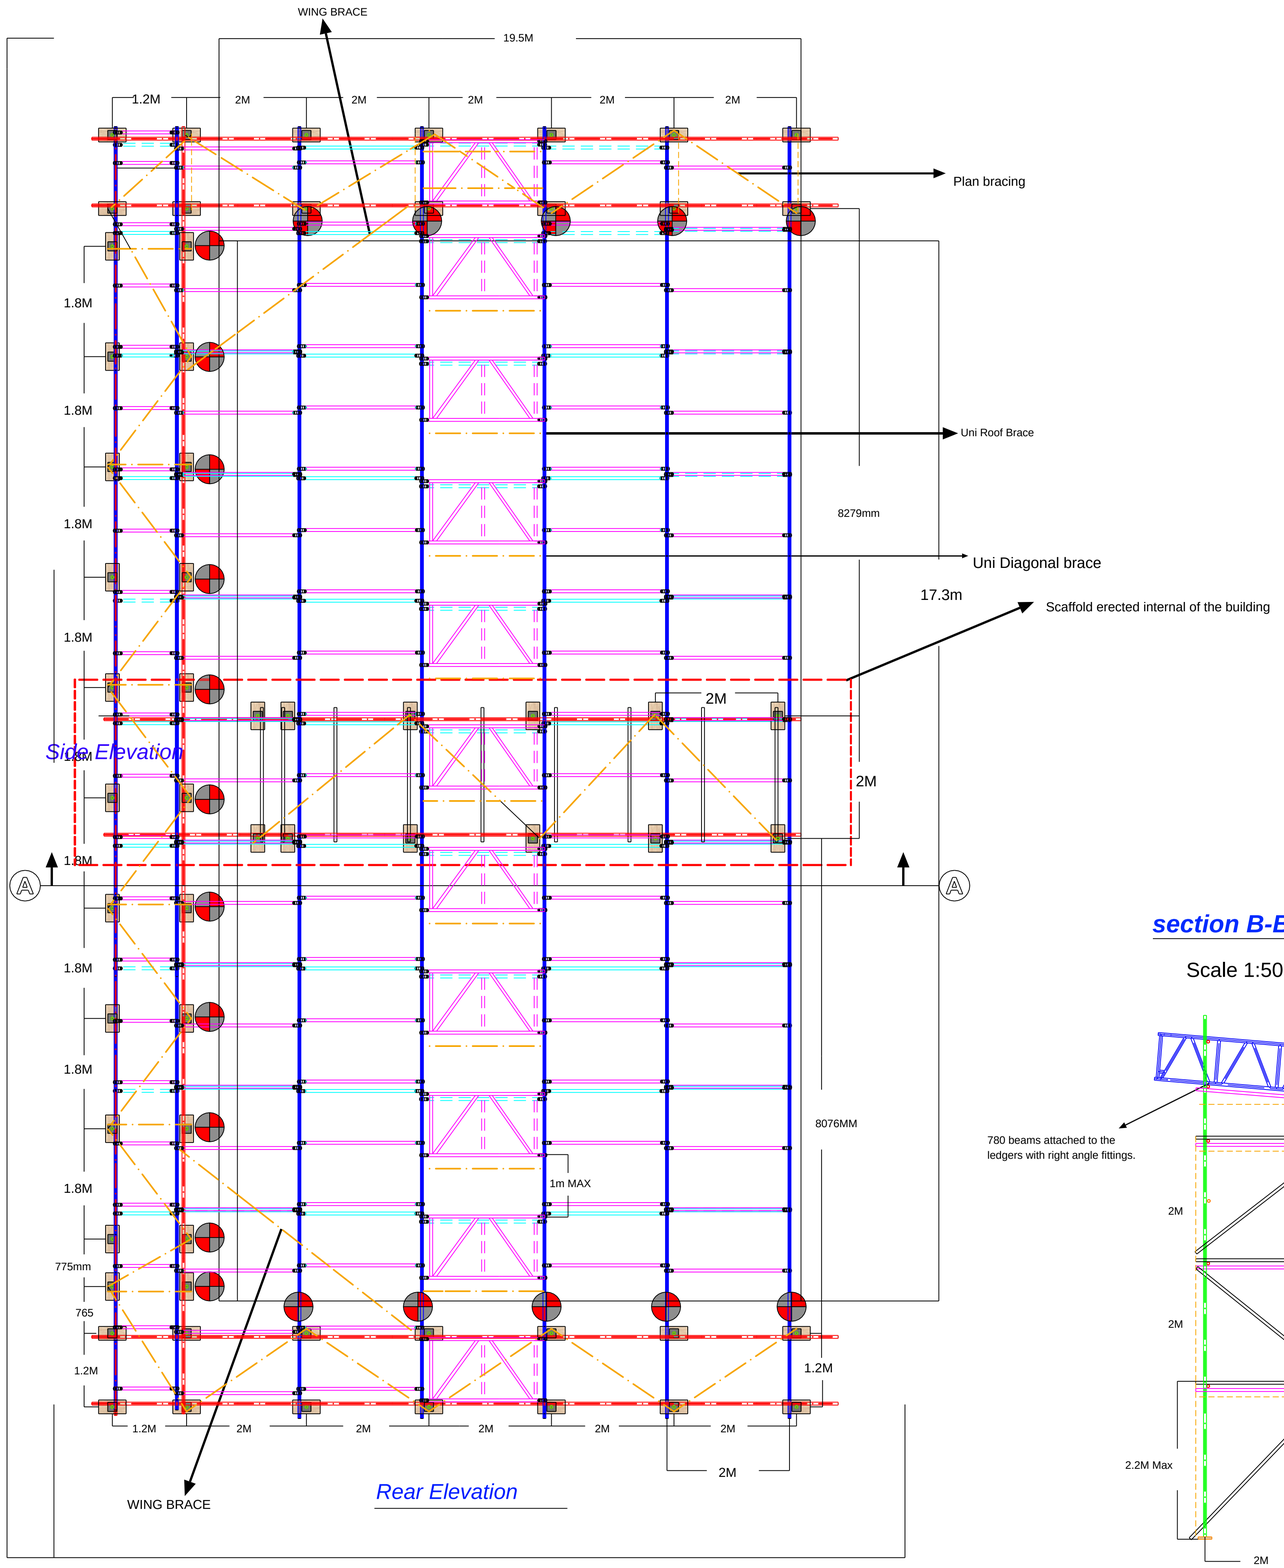

Side Elevation


Rear Elevation


Key / Legends

780 Deep Dessa Beams	
Location of ties	
Guardrails:	
Ledgers	
Board Bearing Transoms	
Standards	
Bracing	
2M length — Horizontals on top cord	
2M length — Horizontals on bottom cord	
2M length — UINI ROOF BRACE	
2M length Frame	
Uni Brace	

section B-B

Scale 1:50

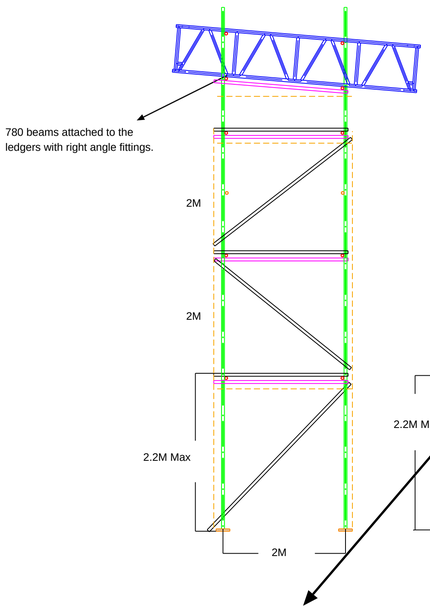

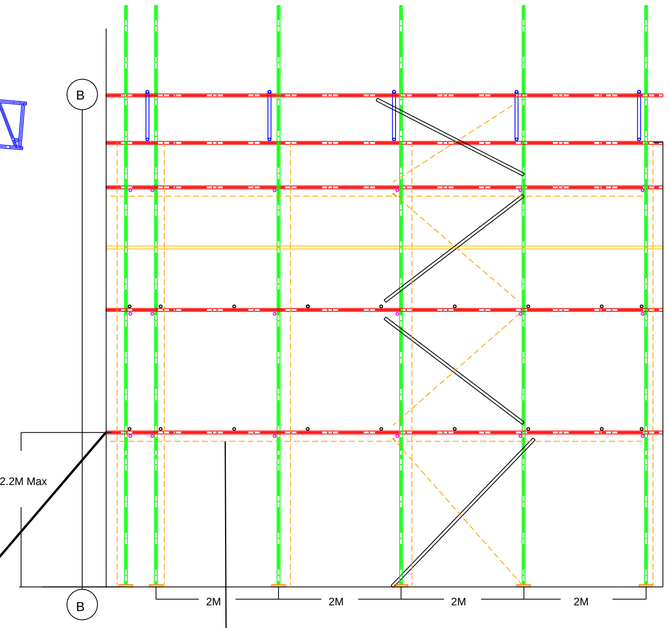

SECTION A-A

Scale 1:50

PLAN VIEW

Scale 1:50

Scale Bar 1:50

1M 1M 1M 2M

INNOVATIVE SCAFFOLDING DESIGNS LTD

Drawing / Design number:

Notes

- Trained and competent persons to erect and dismantle the scaffold type shown in the design
- Uni roof components to be used in the construction of the roof
- Principle contractor is to check and ensure that the ground is suitable to with stand the leg loadings from the scaffold.
- All scaffold components and uni roof components are to be serviced and checked to ensure they are in good condition

Scaffold Design Data

Loading on the working platforms: 2knm2

Max bay size : 2M

Tie Loading : Shear load 4.5kn - pull load 3kn

Tube specifications : 3.2MM - used tube

Number of working platforms : 1

Snow Loads : 0.5knm2

Drawn By: P.L

Checked by : DLC

Date: 28/7/26

Design Status:

Preliminary